


Four Point Angular Contact Ball Bearing

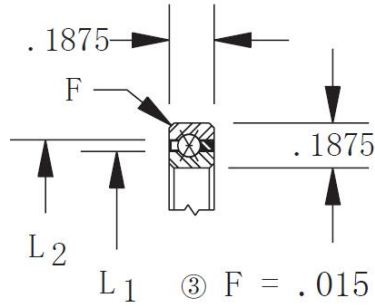

Номер подшипника	Скважина	Размеры в дюймах				Вместимость (фунты)					
		Внешний диам.	L1	L2	Радиальный		Осевой		Крутящий момент (в фунтах)		Вес в фунтах)
					Динамический	Статический	Динамический	Статический	Динамический	Статический	
КАА10XL0	1.000	1.375	1.140	1.235	290	247	730	370	170	110	0.026
КАА15XL0	1.500	1.875	1.640	1.735	400	296	1,000	460	340	187	0.039
КАА17XL0	1.750	2.125	1.890	1.985	460	319	1,140	500	440	232	0.045
КА020XP0	2.000	2.500	2.186	2.314	680	514	1,710	790	770	434	0.10
КА025XP0	2.500	3.000	2.686	2.814	830	583	2,090	910	1,150	601	0.13
КА030XP0	3.000	3.500	3.186	3.314	990	643	2,470	1,010	1,600	785	0.15
КА035XP0	3.500	4.000	3.686	3.814	1,140	701	2,850	1,110	2,130	986	0.18
КА040XP0	4.000	4.500	4.186	4.314	1,290	756	3,220	1,210	2,740	1,205	0.19
КА042XP0	4.250	4.750	4.436	4.564	1,370	783	3,410	1,260	3,070	1,321	0.20
КА045XP0	4.500	5.000	4.686	4.814	1,440	809	3,600	1,310	3,420	1,441	0.22
КА047XP0	4.750	5.250	4.936	5.064	1,520	834	3,790	1,350	3,790	1,565	0.23
КА050XP0	5.000	5.500	5.186	5.314	1,590	859	3,980	1,400	4,180	1,693	0.24
КА055XP0	5.500	6.000	5.686	5.814	1,750	908	4,360	1,480	5,020	1,959	0.25
КА060XP0	6.000	6.500	6.186	6.314	1,900	955	4,740	1,570	5,930	2,240	0.28
КА065XP0	6.500	7.000	6.686	6.814	2,050	1,001	5,120	1,650	6,910	2,535	0.30
КА070XP0	7.000	7.500	7.186	7.314	2,200	1,046	5,500	1,730	7,980	2,844	0.31
КА075XP0	7.500	8.000	7.686	7.814	2,350	1,089	5,880	1,810	9,120	3,165	0.34
КА080XP0	8.000	8.500	8.186	8.314	2,500	1,131	6,260	1,890	10,330	3,499	0.38
КА090XP0	9.000	9.500	9.186	9.314	2,810	1,212	7,020	2,040	12,990	4,204	0.44
КА100XP0	10.000	10.500	10.186	10.314	3,110	1,289	7,780	2,180	15,940	4,956	0.50
КА110XP0	11.000	11.500	11.186	11.314	3,410	1,362	8,540	2,320	19,210	5,750	0.52
КА120XP0	12.000	12.500	12.186	12.314	3,720	1,433	9,300	2,450	22,770	6,587	0.56
КВ020XP0	2.000	2.625	2.231	2.393	930	758	2,340	1,130	1,080	658	0.16
КВ025XP0	2.500	3.125	2.731	2.893	1,140	848	2,840	1,290	1,600	895	0.19
КВ030XP0	3.000	3.625	3.231	3.393	1,340	933	3,350	1,440	2,220	1,159	0.24
КВ035XP0	3.500	4.125	3.731	3.893	1,540	1,014	3,860	1,590	2,940	1,450	0.27
КВ040XP0	4.000	4.625	4.231	4.393	1,750	1,091	4,370	1,720	3,770	1,764	0.30
КВ042XP0	4.250	4.875	4.481	4.643	1,830	1,120	4,570	1,780	4,170	1,917	0.31
КВ045XP0	4.500	5.125	4.731	4.893	1,950	1,165	4,880	1,850	4,690	2,103	0.33
КВ047XP0	4.750	5.375	4.981	5.143	2,030	1,193	5,080	1,900	5,140	2,265	0.34